



List of participants		
MAN Diesel & Turbo	Niels Freese	Niels.Freese@man.eu
University of Erlangen	Thomas Seeger	thomas.seeger@yahoo.de
Germanischer Lloyd	Benjamin Scholz	benjamin.scholz@gl-group.com
Jönköping University	Ingvar Svensson	Ingvar.Svensson@jth.hj.se
Kistler Instrumente Wintherthur AG	Walter Meier	'walter.meier@kistler.com'
Lund University	Mattias Richter	'mattias.richter@forbrf.lth.se'
Sandvik Powdermet	Tomas Berglund	tomas.berglund@sandvik.com
TGE Marine Gas Engineering	Hans-Christian Haarmann-Kuehn	'hans-christian.haarmann- kuehn@tge-marine.com'
Uppsala University	Staffan Jacobson	'staffan.jacobson@angstrom.uu.se'


Environmental benefits	
NO _x	24% reduction
CO ₂	23% reduction
Methane 'slip':	0.2-0.3 g/kWh
PM	85% reduction
CO	Very low
SO ₂	Very low. From pilot oil
Smoke	Almost eliminated
Thermal efficiency	Very high

Running-in and testing of the gas fuelled research engine, 14 April 2011 – 31 December 2013	
Engine operation on gas (1)	420 hours
Consumption of gas	301 tonnes
Consumption of N ₂	5.046 m ³
Consumption of LIN	143 tonnes

(1): Within WP1 and for testing in WP2, 3, 8 and 9


N₂ is used for purging of the engine, and liquid N₂ is used for purging of the fuel gas supply system.

Sketch of the gas fuelled Diesel engine

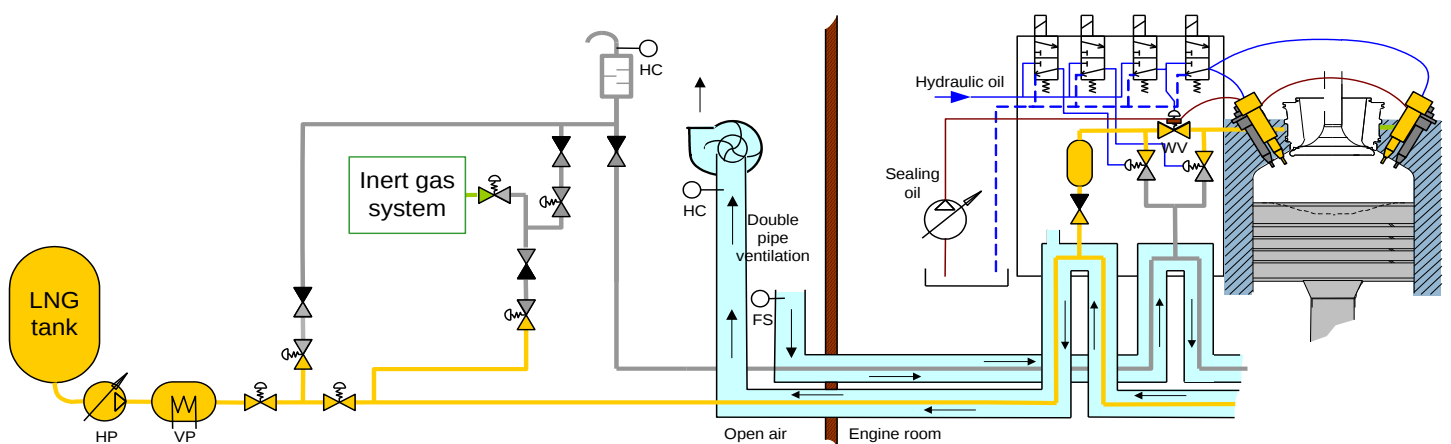







Gas injection valve

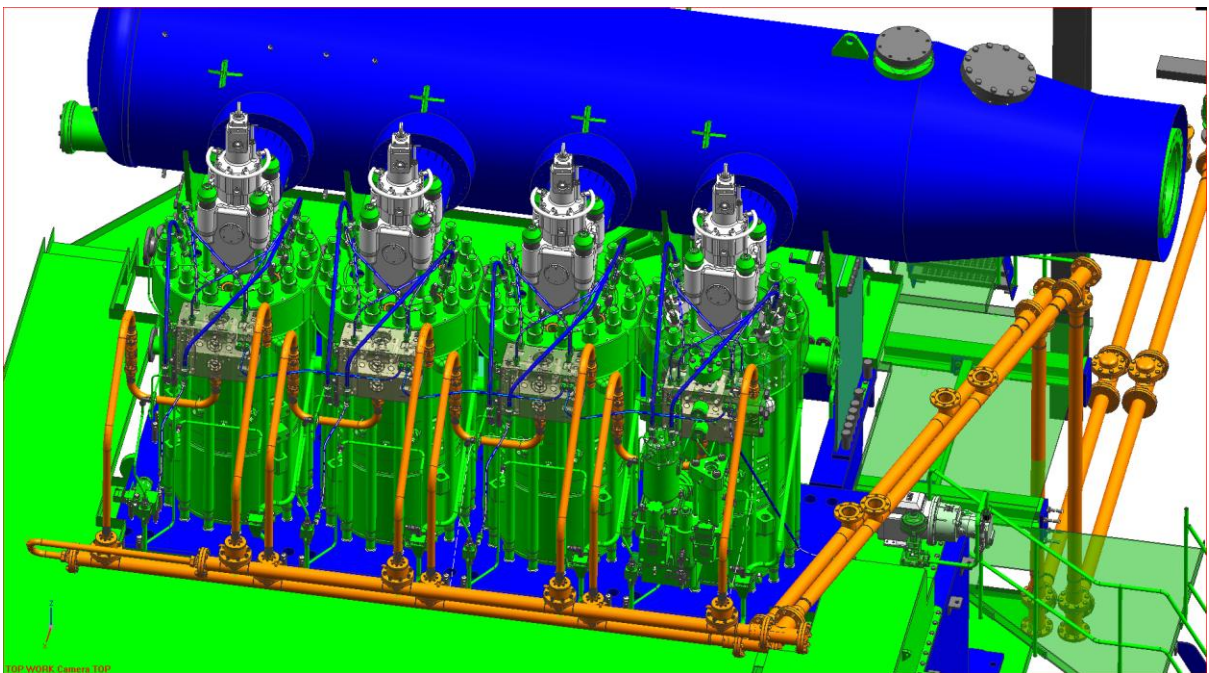

The top of the gas engine




Tests carried out		
Type	Results	Period
WP1-WP2, Confirmation of basic gas operation and performance. Verification of test set-up	A well functioning engine and positive results compared with diesel operation	April-May 2011
WP2, Gas parameter test, stage I. performance and baseline	Emissions and performance compared with diesel operation	August 2011
WP2, Performance and emissions. Reference test and baseline	Emissions and performance compared with diesel operation	February-March 2012
WP3 Gas+EGR	Compliance to TierIII NOx emission limits demonstrated through use of EGR. Emission and performance compared to diesel operation	September 2013
WP3 Gas pre-injection	Single cylinder tests of early gas injection established limits of stable ignition	October 2013
Type	Results	Period
WP3 High-speed imaging	Ignition and flame development in diesel and gas operation visualized using borescope and high-speed camera	January 2011 May 2011 October 2013
WP3&8 Spectrometer survey	Spectral emission of gas and diesel combustion characterized	March 2012
WP3&8 UV high-speed imaging	UV high-speed imaging of gas ignition attempted, problems with UV borescope performance encountered	September 2012
WP3&8 Thermographic phosphors test	Laser based surface temperature measurements demonstrated	November 2012
WP3&8 Thermographic phosphors via fibre	Fibre based probing of surface temperatures tested	December 2013
WP3&8 Laser induced fluorescence imaging	Laser sheet imaging of gas jet attempted, problems with window failure encountered	December 2013
WP10 Preliminary test of gas sensor	On-line gas composition analysis at medium-pressure demonstrated	March 2012
WP10 Final test of gas sensor	On-line gas composition analysis at high-pressure demonstrated	September 2013

SFOC and specific NO_x emissions for gas and diesel operation

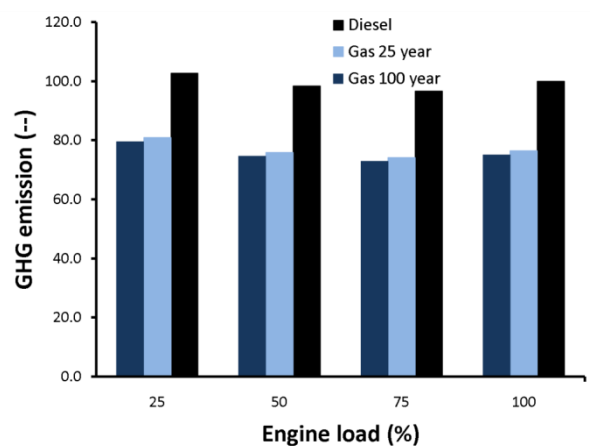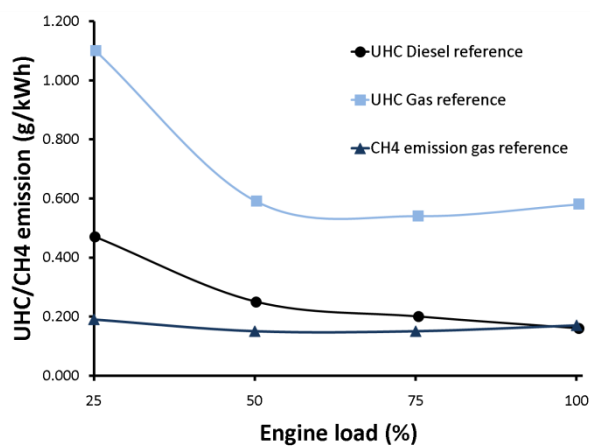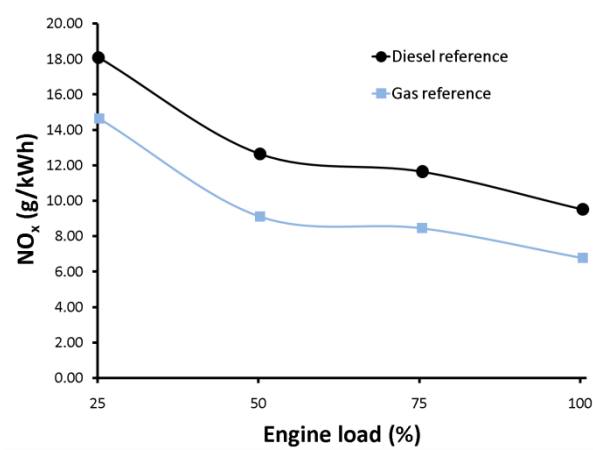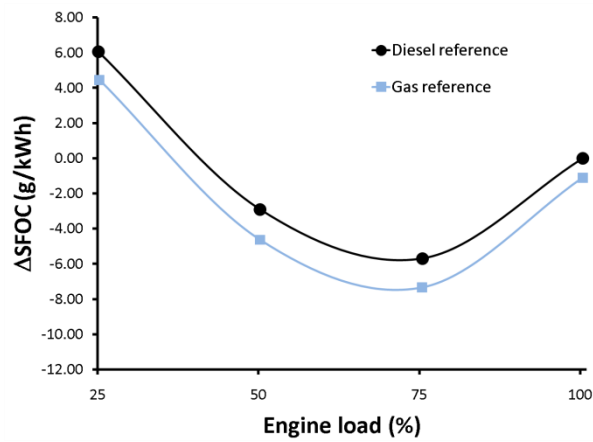

Left: Emission of unburned hydrocarbons for gas and diesel oil operation and methane emission (slip) for gas operation. Right: Green house gas emission from gas and diesel oil operation.


SFOC for gas and diesel oil reference tests and for NOx/SFOC tuning tests.

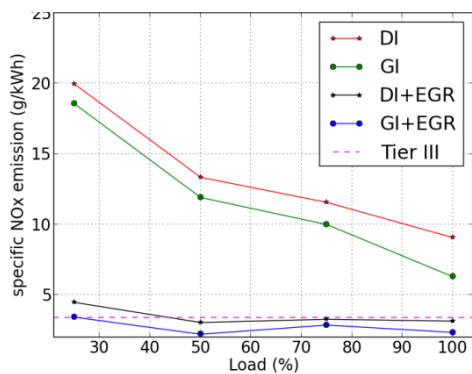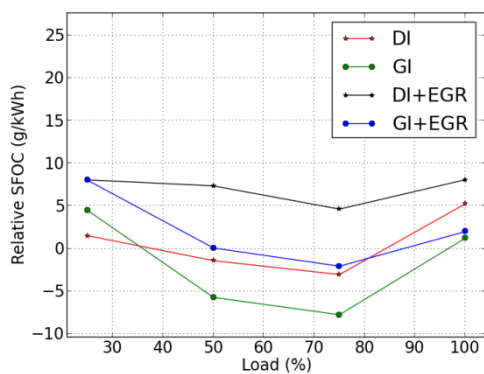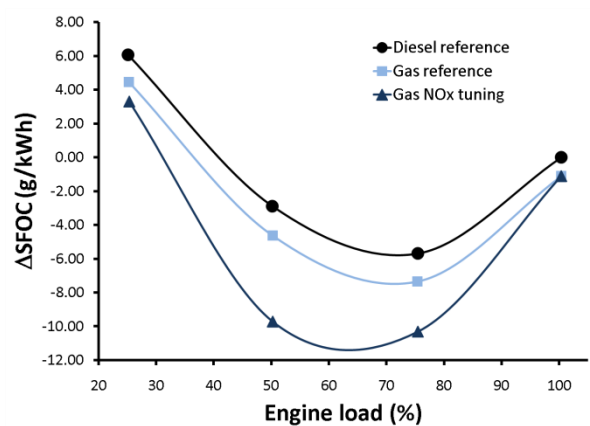

Mode	NO _x g/kWh	SFOC g/kWh
Diesel	11.50	+4.05
Diesel+EGR	3.28	+10.37
Gas	9.60	0
Gas+EGR	2.68	+4.16
<i>Tier III</i>	<i>3.4</i>	

Cycle weighted
NOx and SFOC


SFOC and NO_x emissions for gas and diesel operation, with and without EGR

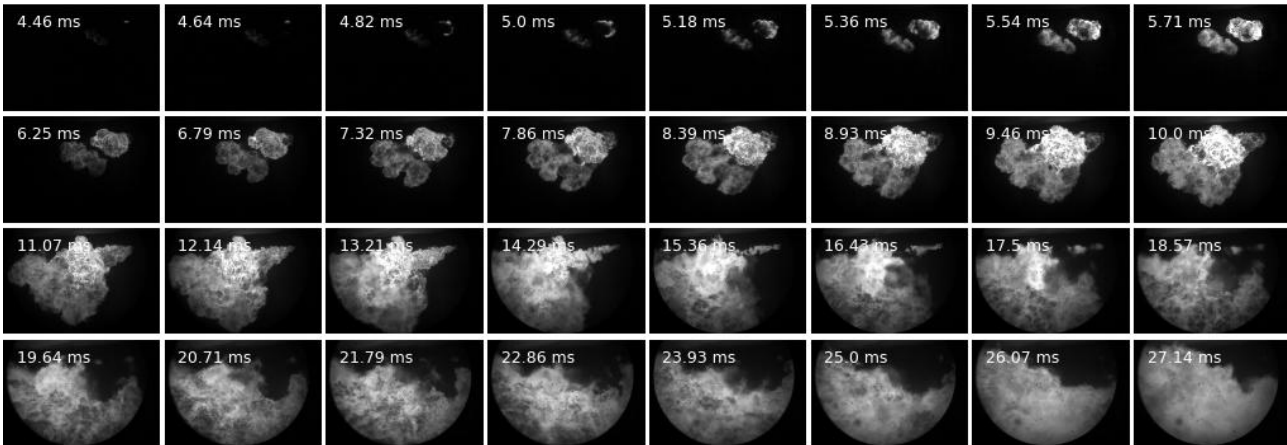

High-speed sequence of pilot ignited gas combustion.




Gas cover

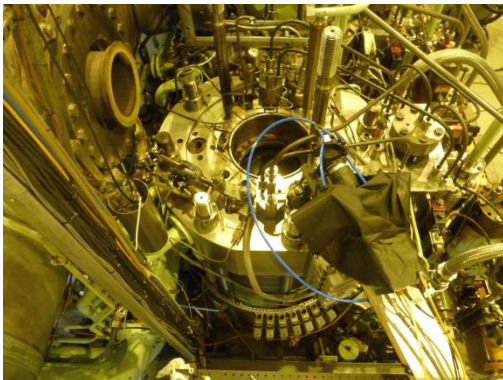

Camera insert




Mounted laser and camera inserts

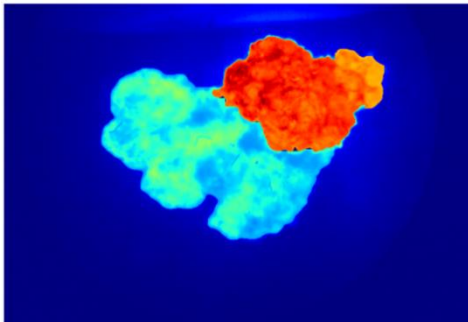


Diesel pilot (red), gas flame (cyan)




2-stroke exhaust valve

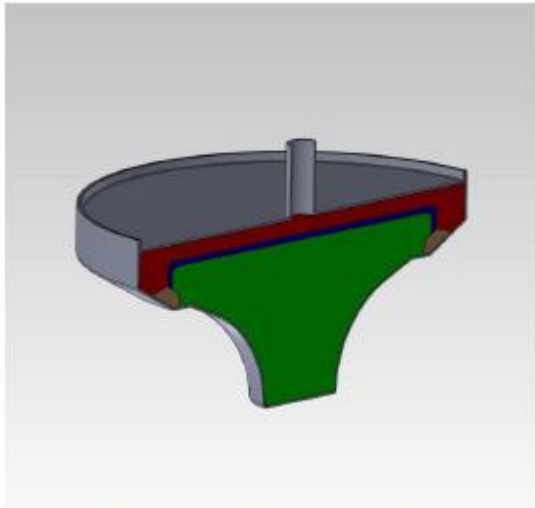

HIP compound spindle disc capsule

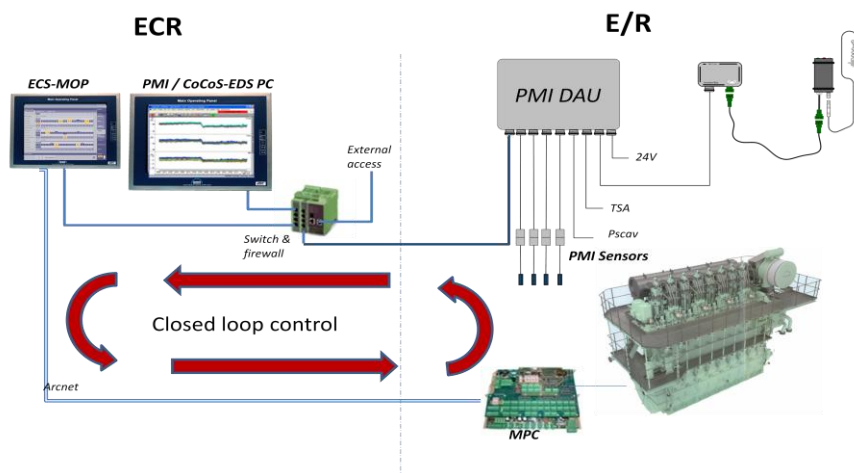


Control system

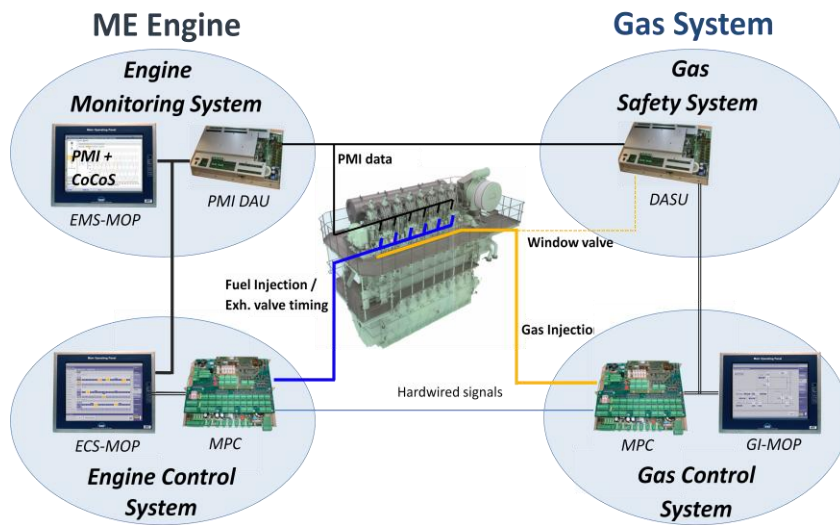

Gas control strategy


Fuel Oil Compensation for Gas Principle During Engine Load Up

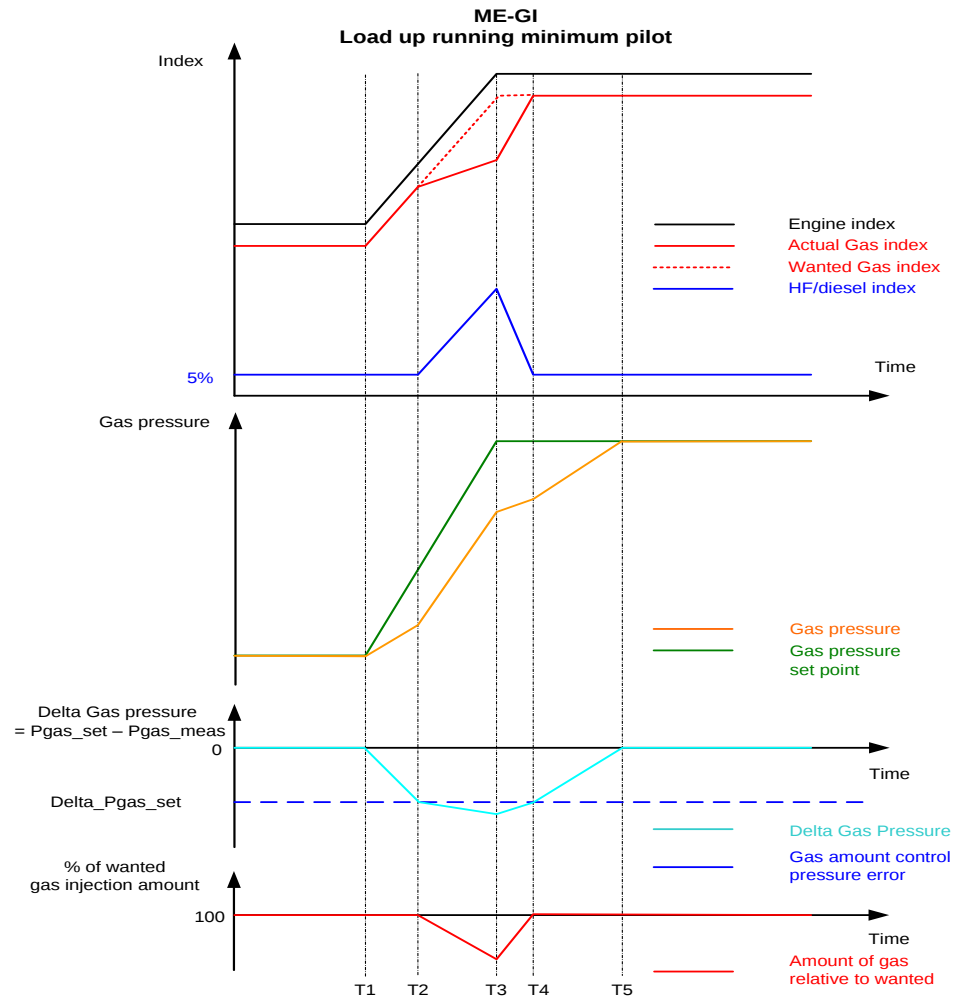

With auto-intermittent gas operation the gas amount is being fast-ramped





Reference Sensor & HCD

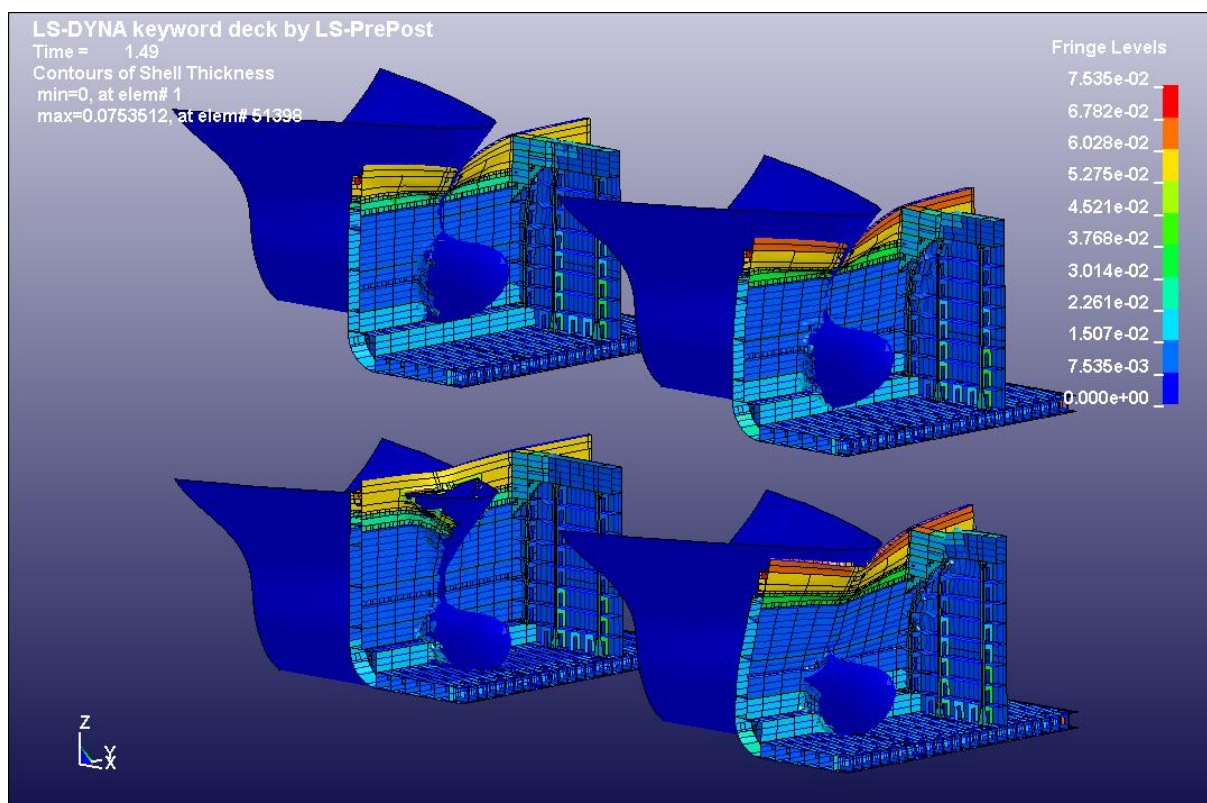



Safety: collision scenario




The Helios lab scale test rig, allowing two simultaneous reciprocating sliding tests (left) and a close up of one of the two the sample fixtures (right). Letter A) corresponds to the stationary ring and B) to the reciprocating cylinder sample. The arrow shows the movement of sample B.

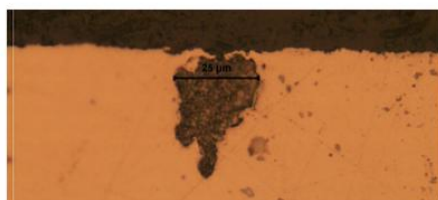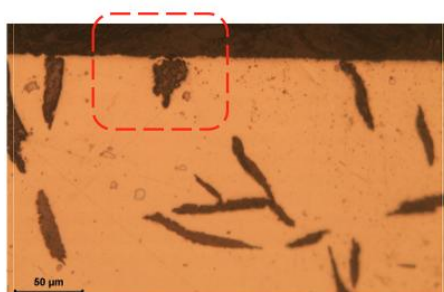


Closing of the open structure by superficial shear **perpendicular** to the sliding motion!

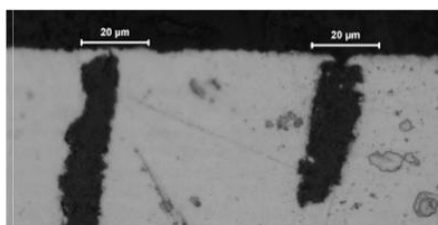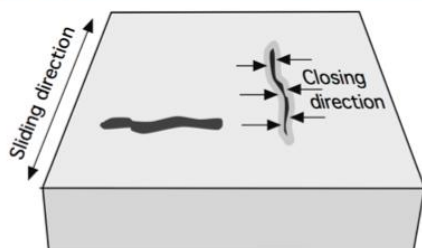

Graphite lamella closing mechanism studied in cross section.

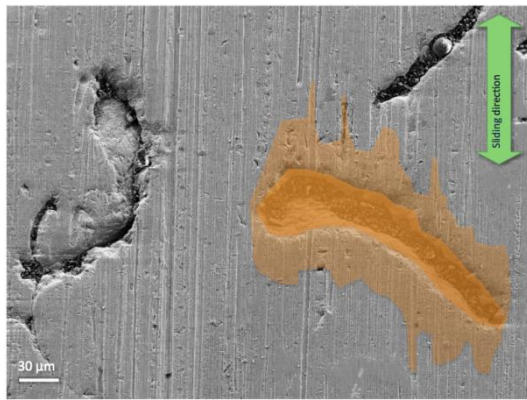


a)

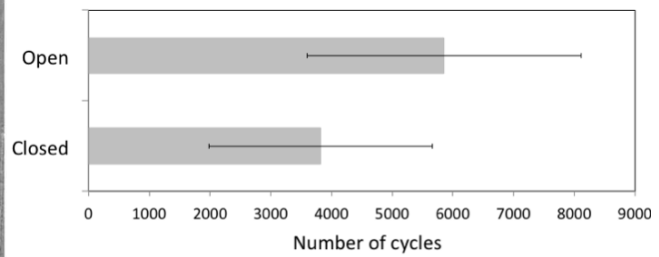

b)

a) Illustration of the reservoir mechanism of open graphite. These reservoirs may appear small but our tests have shown that initial addition of a 1 μm oil film ($\approx 1 \text{ g/m}^2$) is enough to prevent scuffing for thousands of cycles in the test rig. b) Reduction in number of cycles to scuffing caused by only a low degree of closing graphite.

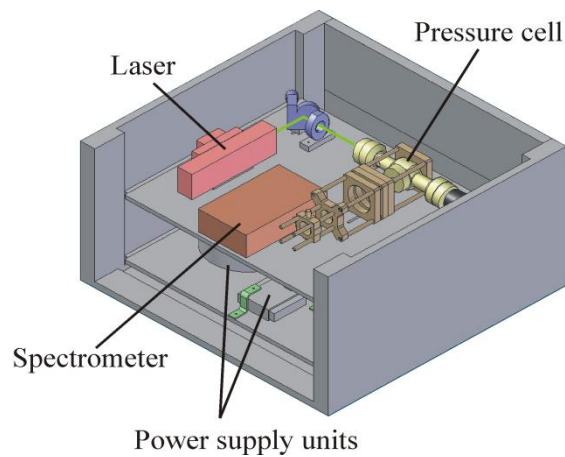

Scheme of the sensor system